




INNOVATIVE SENSOR TECHNOLOGY


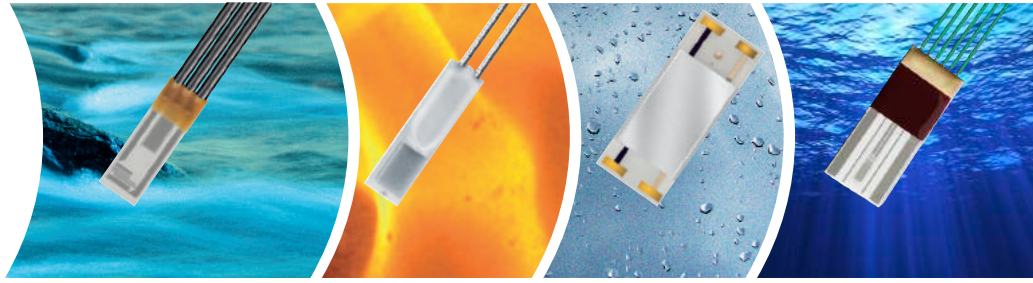


# Combined digital humidity and temperature modules

HYT 271 HYT 221 HYT 939


## BENEFITS

- Humidity range: 0% RH to 100% RH
- Low drift
  - Normal conditions:  $< 0.5\%$  RH at  $25\text{ }^{\circ}\text{C}$  / year
  - Extreme conditions:  $0.17\%$  RH at  $85\%$  RH at  $30\text{ }^{\circ}\text{C}$  / 65 h
- Temperature range:  $-40\text{ }^{\circ}\text{C}$  to  $+125\text{ }^{\circ}\text{C}$
- High accuracy:  $\pm 1.8\%$  RH and  $0.2\text{ }^{\circ}\text{C}$
- Fully calibrated and compensated humidity and temperature signal
- Low power consumption:  $22\text{ }\mu\text{A}$  during operation
- Digital I<sup>2</sup>C interface (14 bit values)
- High chemical resistance to various gases: O<sub>2</sub>, CO<sub>2</sub>, SF<sub>6</sub>, NH<sub>3</sub>, CH<sub>4</sub>, etc
- Condensed water proof sensing area
- Can be recalibrated





INNOVATIVE SENSOR TECHNOLOGY

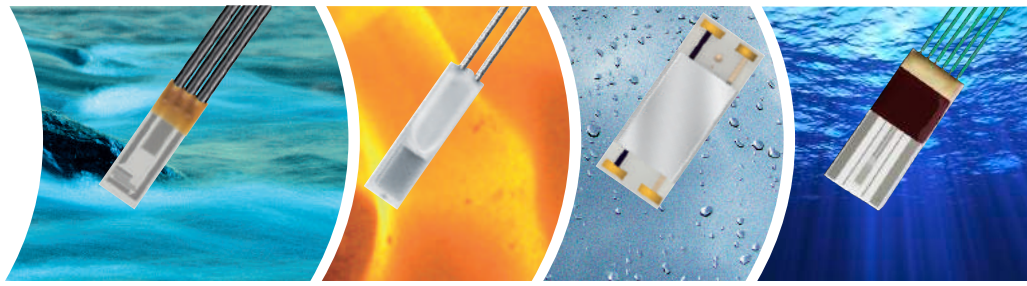


## GENERAL DESCRIPTION

Mechanically robust, chemical and condensed water proof sensing area, the digital HYT module offers a wide application window and an optimal price performance ratio. Precisely calibrated, the HYT modules deliver an outstanding accuracy and an excellent long term stability even at high humidity - ideal for sophisticated mass applications, industrial handheld devices and precise humidity transmitters. Like all representatives of the HYT family, the module combines the advantages of a precise, capacitive polymer humidity sensor with the high integration density and functionality of an ASIC. The signal processing integrated in the HYT module completely processes the measured data and directly delivers the parameters of relative humidity and temperature over the I<sup>2</sup>C compatible interface as digital values. The module is precisely calibrated and is therefore fully interchangeable without adjustment.



HYT 271  
All-round talent for most applications



HYT 221  
With protection filter for splash water applications




HYT 939  
With protection filter for splash water applications  
(gas pressure resistant packaging upon request)






INNOVATIVE SENSOR TECHNOLOGY

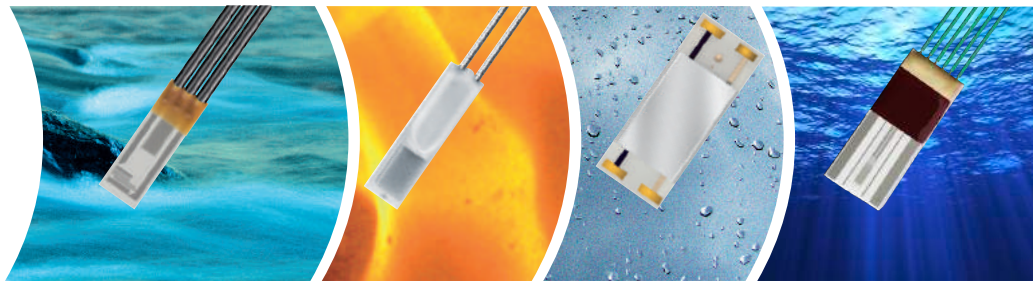

## COMBINATION OF HUMIDITY ELEMENT AND ASIC

The separated ASIC and sensor assembly strongly reduces the self-heating impact and the influence of humidity absorbing materials on the sensor element

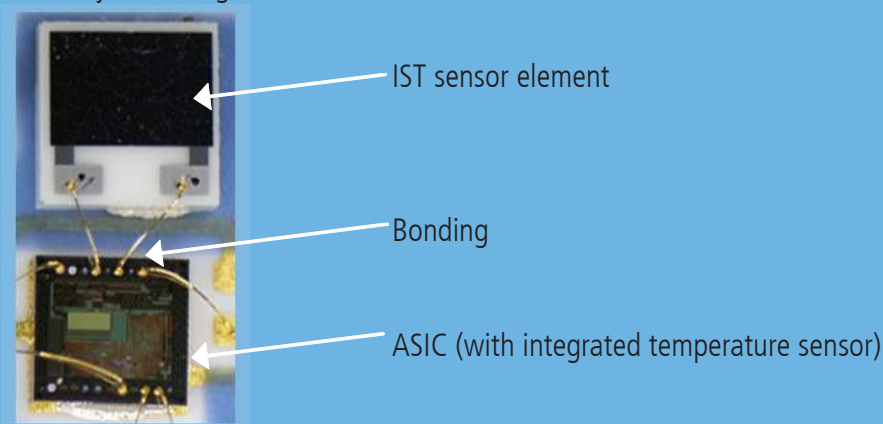

### Packaging of integrated circuit

Technical Data*	Humidity	Temperature
Range	0% RH to 100% RH	-40 °C to +125 °C
Accuracy	+/-1.8% RH (0% RH to 80% RH)	+/-0.2 K (0 °C to 60 °C)
Measuring principle	Capacitive polymer humidity sensor	PTAT bandgap sensor
Response time $t_{63\%}$	5 s to 12 s (based on module type)	
Stability		
Reproducibility	+/- 0.2% RH	+/-0.1 K
Hysteresis	< +/-1% RH	
Long term drift	< 0.5% RH/a	< 0.05 K/a
Operating data		
Operating voltage	2.7 V to 5.5 V	
Current consumption (nominal)	< 22 $\mu$ A at 1 Hz measuring rate	
Current consumption (sleep)	< 1 $\mu$ A	
Digital interface	I <sup>2</sup> C, address 0x28 or alternative address	



\*See datasheet for more information







INNOVATIVE SENSOR TECHNOLOGY

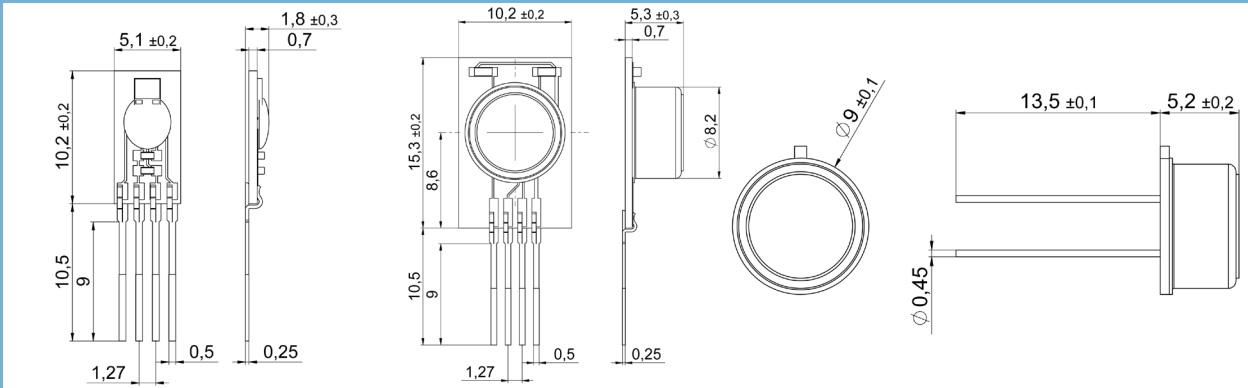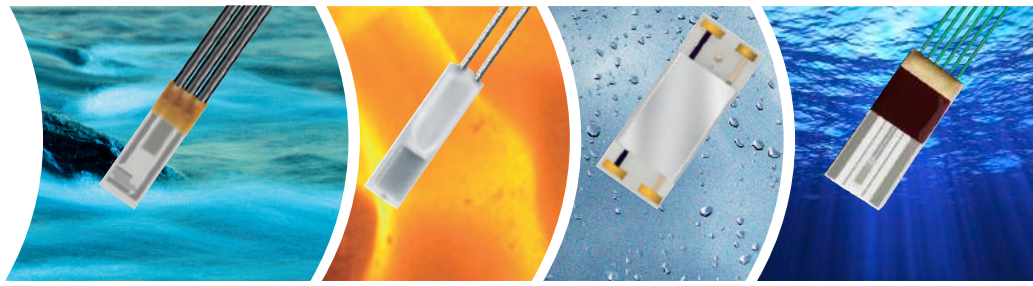

HYT 271

HYT 221

HYT 939

### INDUSTRIES



HVAC



Process Control



Test & Measurement



Medical



Appliance

### CONTACT

Innovative Sensor Technology USA Division  
9516 W. Flamingo Rd., Ste 210  
Las Vegas NV 89147

Phone: +1(702) 894 9891  
Fax: + 1(702) 894 9993



Web: [www.ist-usadivision.com](http://www.ist-usadivision.com)

